

POROSITY DETECTOR CALIBRATION

Application

- Verification of output voltage and set voltage of detectors when a load is applied to the probe.
- To ensure accuracy, and to enable voltage adjustment (if necessary).

Features

- Used for checking & calibrating Porosity Detector output voltage
- Compact, lightweight hand-held unit
- Integral probe
- Conformance Certificate
- Carry Case (36 x 29 x 18)

**DC Crest Meter**

DC Crest Meter Specifications

Range: 0 to 30kV
 Resolution: 10V (0 to 20kV)
 100V (0 to 30kV)

Earth Lead: Separate

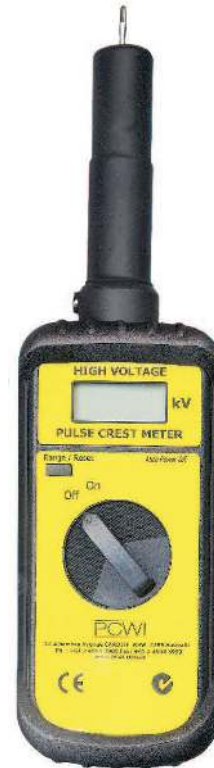
Dimensions: 260 x 85 x 50mm
 Weight: 380g

Pulse Crest Meter Specifications

Range: 5 to 30kV
 Resolution: 100V

Earth Lead: Integral

Dimensions: 300 x 75 x 40mm
 Weight: 390g

**Pulse Crest Meter****Made in AUSTRALIA**

Certification available
 (Pulse Crest meter to 30kV only)

(suitable for PCWI Pulse Detectors only)

Visit us on the World Wide Web at www.checkline.com

ELECTROMATIC Equipment Co., Inc., 600 Oakland Ave., Cedarhurst, NY 11516 – USA
 Tel: 800-645-4330 (USA & Canada) ■ Tel: (516) 295-4300 ■ Fax: (516) 295-4399